

Hand dryer with push button


- Hand dryer activated by timed push button.
- Model for mounting on the surface.
- Stainless steel sheet housing satin finish. Also available in polish finish (NOFER 01250.B) and white finish (NOFER 01250.W).
- Suitable for collectivities and places of high frequency of use.
- Indicated for uninterrupted use. Top quality components.
- Robust, anti-vandal and safe because it is built without sharp edges or other dangerous elements.
- In accordance with European safety directives (EC).

TECHNICAL DATA

- Housing made of one piece satin finish of AISI 304 stainless steel (thickness=1 mm).
- Air temperature (environment 20°C): 50°C to 10 cm.
- Motor speed: 2800 r.p.m.
- Air speed: 65 km/h.
- Total power: 1500 W.
- Motor power: 110 W.
- Voltage/Frequency: 220-240 - 50/60 Hz.
- Electric insulation: Class II.
- Automatic stop due to vandalism.
- Maximum consumption of 6,6 A.
- Noise level at 2 meters: 60 dBA.
- Protection index: IPX1.
- Dimensions: 240 height x 280 width x 165 depth (mm).
- Net weight: 3,5 kg.
- Electrical protection of the motor: fuse. Electrical protection of the resistance: internal thermostat.
- Function: press the button, the hand dryer is activated and place you hands under the appliance. The appliance is automatically turned off by a timer.
- Cleaning: we recommend cleaning with a cotton cloth slightly moistened with a soap solution. Then dry it.
- Estimated drying time: 40 seconds.

SUGGESTED TEXT FOR PRESCRIPTION

NOFER hand dryer, with AISI 304 stainless steel housing satin finish, hot air operated by push button, 1500 W power and temperature of 50°C. Motor speed 2800 r.p.m. Dimensions: 240 height x 280 width x 165 depth (mm).



NOFER S.L.
 Avenida de la fama, 118
 08940 · Cornellà de Llobregat (Barcelona)
 Tel +34 934 742 423 · Fax +34 934 743 548
 nofer@nofer.com · www.nofer.com

Related Products


01101.B

01151.S

01250.B

01600.S

TECHNICAL DRAWING

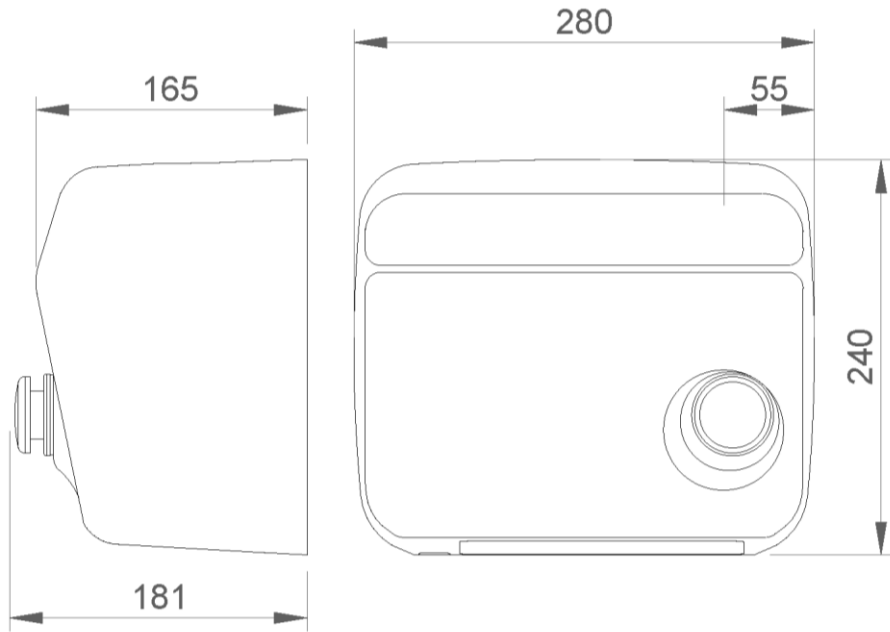

DIMENSIONS IN mm



NOFER S.L.
Avenida de la fama, 118
08940 · Cornellà de Llobregat (Barcelona)
Tel +34 934 742 423 · Fax +34 934 743 548
nofer@nofer.com · www.nofer.com