

Liquid soap dispenser


- Automatic liquid soap dispenser to built in countertop. Chrome-plated brass gloss finish.
- Activation by infrared ray sensor.
- Suitable for public places of high frequency of use.
- Durability and resistance against rust and corrosion.
- Suitable for liquid soap or hand sanitizer (7,5%).

SUGGESTED TEST FOR PRESCRIPTION

NOFER automatic liquid soap dispenser with infrared activation system, chromed brass gloss finish. Dimensions: 104 height x Ø28 width x 117 depth (mm). Under counter diameter: 0-52, Ø23 (mm).

TECHNICAL DATA

- Body made of chromed brass, gloss finish.
- Electronic infrared sensor that stops the dispenser when the hands are removed from the detection field.
- Power supply: transformer to 12 V. Optional with batteries.
- Capacity: 1000ml. Refillable.
- Detection range of the sensor: 50 mm.
- Standard soap discharge: 0,8 cc, adjustable.
- Sensor range: 30-100 mm (±10 mm)adjustable by remote control.
- Soap viscosity: 100-3800 cPs.
- Dimensions: 104 height x Ø28 width x 117 depth (mm). Under counter diameter: 0-52, Ø23 (mm).
- Operation: place your hands under the dispenser. This is activated automatically, remaining in operation while the hands are inside the sensor field. The dispenser turns off after a few seconds of removing them.
- Maintenance: for cleaning use only neutral soap and water, then wipe dry with a clean cloth. When cleaning bathroom tiles or similar, the soap dispenser should be protected from any splattering of harsh cleansers.



NOFER S.L.
 Avenida de la fama, 118
 08940 · Cornellà de Llobregat (Barcelona)
 Tel +34 934 742 423 · Fax +34 934 743 548
 export@nofer.com · www.nofer.com

Related Products

01911.B

03023.B


03101.B

07250.B

03202.S

03201.S

TECHNICAL DRAWING

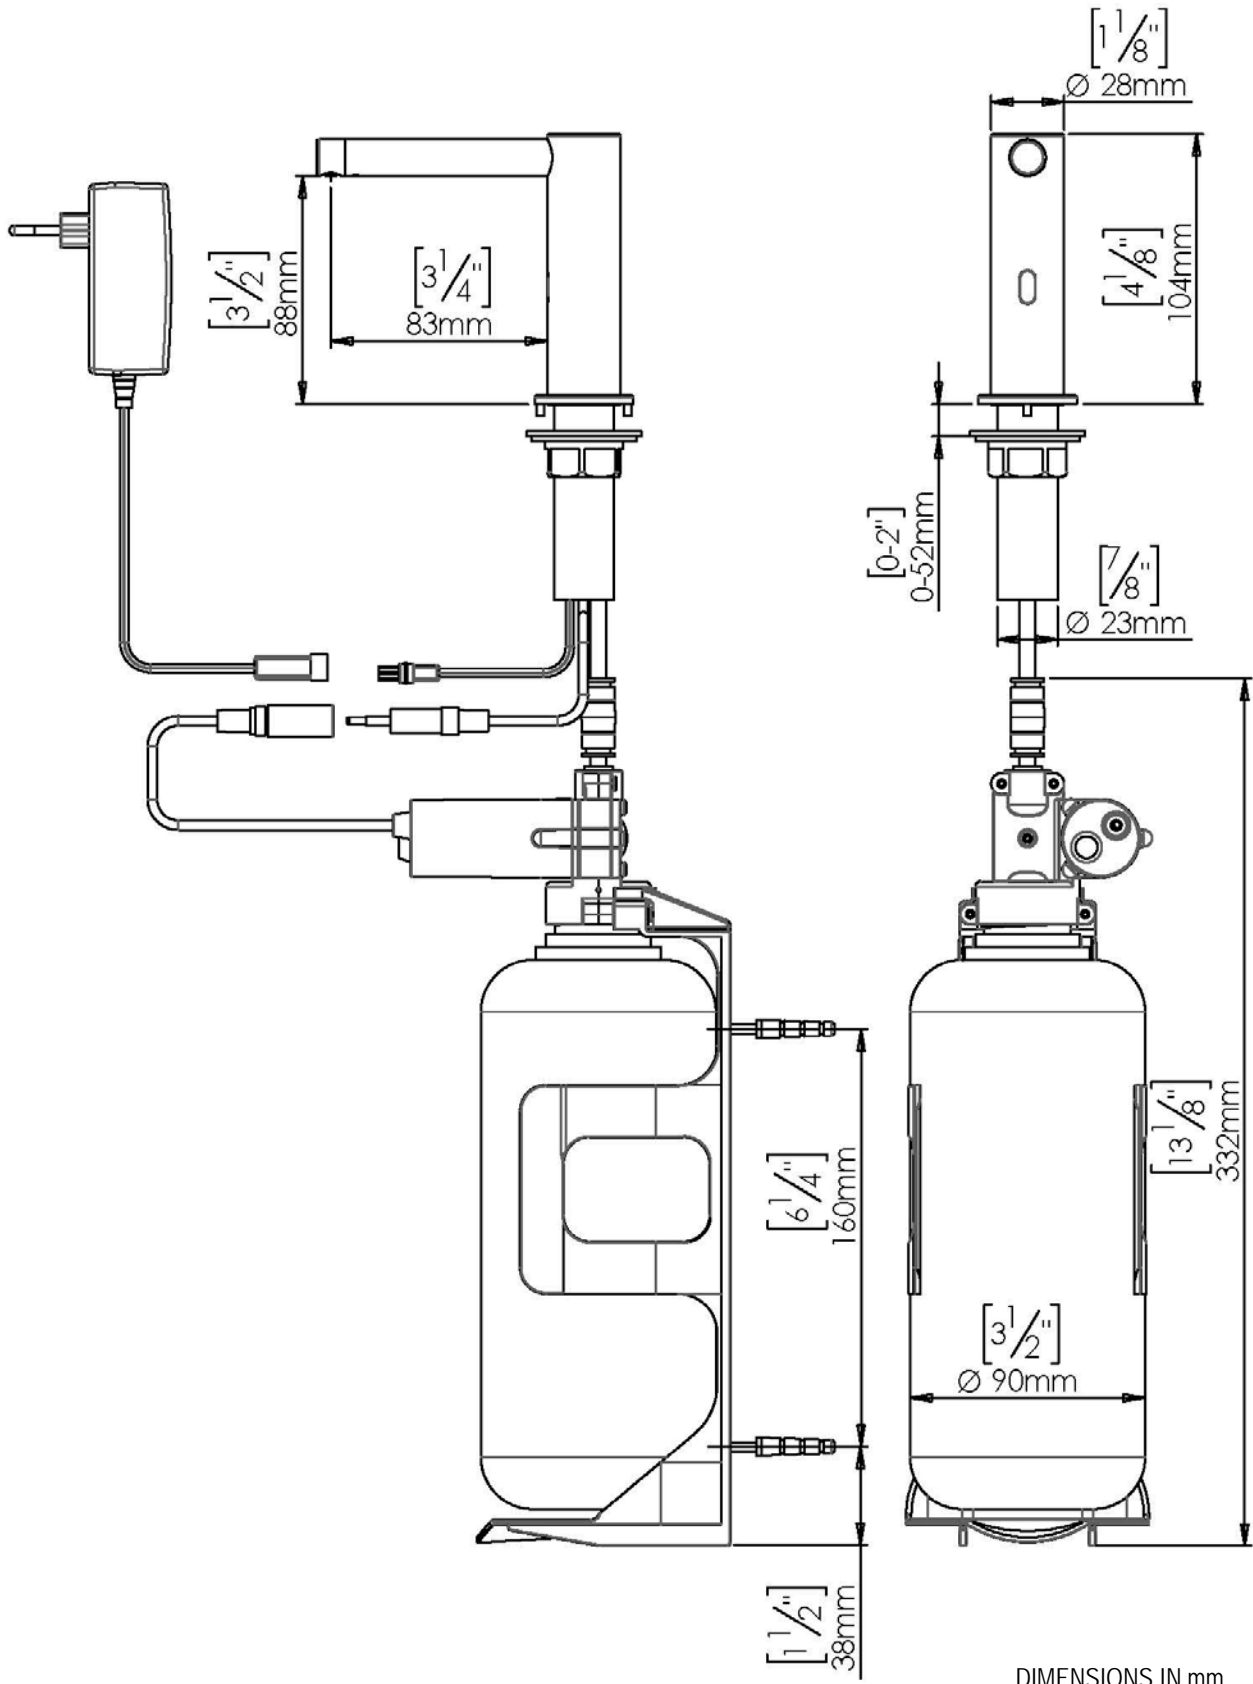

DIMENSIONS IN mm



NOFER S.L.
 Avenida de la fama, 118
 08940 · Cornellà de Llobregat (Barcelona)
 Tel +34 934 742 423 · Fax +34 934 743 548
 export@nofer.com · www.nofer.com