

Automatic electronic hand dryer with UVC leds


- Hand dryer with electronic sensor and UVC led lights.
- Anti-Bactericidal and Anti-viral properties.
- Surface mounted.
- Stainless steel housing, polished finish.
Satin matt (01831.UV.S) and black painted(01831.UV.N) versions also available. Other colours on request.
- Ideal for public use and high traffic areas.
- Anti-vandal, robust design and construction.
- Smooth edges.
- In accordance with European safety directives (EC).

TECHNICAL DATA

- Housing made with one piece stainless steel AISI 304 (e=1.2mm)
 - Wall mounted. 4 drill holes. Fixing kit included (8mm).
 - Installation: wall mounted. Allow at least 20cm under the unit for the hand drying area.
 - Electronic infrared sensor with automatic cut off when hands are removed from the drying area.
 - UVC led light that switch on when the hand dryer is activated.
 - Power led light: 10W.
 - Wavelength 240 nanometers.
 - Air temperature (environment): 40°C with 10cm range.
 - Universal type motor, no brushes (low maintenance).
 - Motor speed: 3500 r.p.m.
 - Air speed 305 km/h.
 - Total power: 800W
 - Motor power: 800W
 - Voltage/Frequency: 220-240 - 50/60Hz.
 - Electric insulation: Class I
 - Thermostat overheating resistance (automatic reset).
 - Double safety thermal fuse calibrated to 133°C.
 - Sensor range: 0-20cm.
 - Maximum consumption: 3.5A
 - Noise level @ 2 meters: 72 dBA.
 - Protection rating against water spray: IPX1.
 - Dimensions: 327x164x151mm (height x width x depth).
 - Packaging dimensions: 360x215x180mm (height x width x depth)
 - Net weight: 4.7Kg.
 - Gross weight inc.packaging: 5.1 Kg.
- Instructions for use: place hands under the unit in the drying area . The dryer will turn on automatically and turn off a few seconds after the hands are removed from the drying area.
- Estimated drying time: 10-12 seconds.
- Cleaning: we recommend cleaning the unit with a damp cotton cloth. A gently soap solution may be used. Then dry with a dry cloth.

SUGGESTED TEXT FOR PRESCRIPTION

NOFER hand dryer with UVC led light. AISI 304 stainless steel housing available in different finishes. Hot air operation with electronic sensor. 800W power with a temperature of 40°C. Motor speed 35000 r.p.m.
Dimensions: 327x164x151mm (height x width x depth).



INDELE Limited
7 Bell Yard, London, WC2A 2JR
t. 01256 976 821 | sales@indele.co.uk
www.indele.co.uk | Company Reg: 10445602

Related products


01451.B

01461.W

01831.S

01451.W


TECHNICAL DRAWING

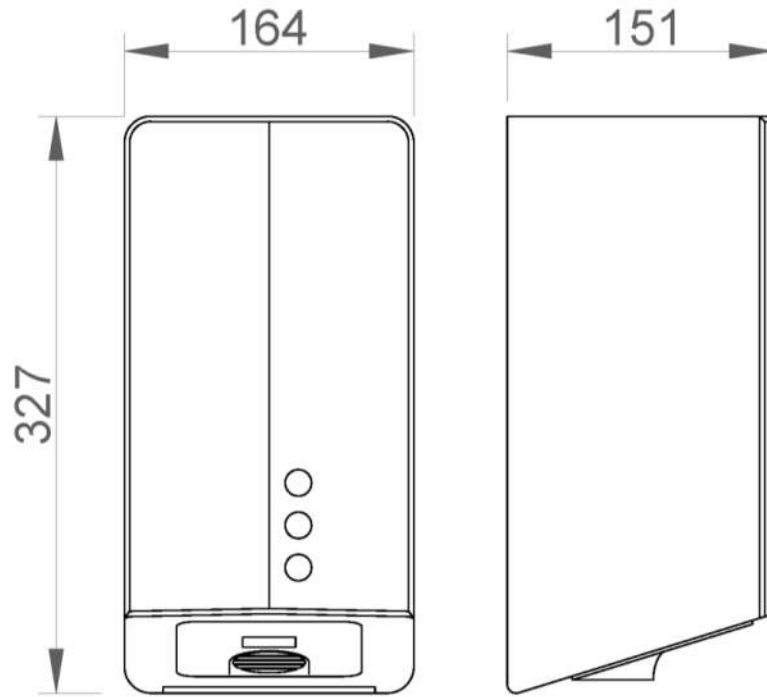

DIMENSIONS IN mm



INDELE Limited
7 Bell Yard, London, WC2A 2JR
t. 01256 976 821 | sales@indele.co.uk
www.indele.co.uk | Company Reg. 10445602

