

Automatic electronic hand dryer


- Automatic electronic stainless steel hand dryer.
- Model for mounting on the surface.
- Stainless steel sheet housing polish finish. Also available in satin finish (NOFER 01251.S) and white finish (NOFER 01251.W).
- Suitable for collectivities and places of high frequency of use.
- Robust, anti-vandal and safe because it is built without sharp edges or other dangerous elements.
- In accordance with European safety directives (EC).

TECHNICAL DATA

- Housing made of one piece polish finish of AISI 304 stainless steel (thickness=1 mm).
- Electronic infrared sensor that stops the hand dryer when the hands are removed from the detection field.
- Air temperature (environment 20°C): 50°C to 10 cm.
- Motor speed: 2800 r.p.m.
- Air speed: 65 km/h.
- Air flow: 2300 l/min.
- Total power: 1500 W.
- Motor power: 110 W.
- Voltage/Frequency: 220-240 - 50/60 Hz.
- Electric insulation: Class II.
- Maximum consumption of 6,6 A.
- Noise level at 2 meters: 60 dBA.
- Protection index: IPX1.
- Dimensions: 240 height x 280 width x 165 depth (mm).
- Net weight: 3,5 kg.
- With safety thermal limiter and automatic stoppage due to vandalism.
- Function: place your hands under the appliance. The hand dryer activates automatically, remaining in operation while the hands are inside the field of the sensor. The appliance switches off after a few seconds of removing them.
- Cleaning: we recommend cleaning with a cotton cloth slightly moistened with a soap solution. Then dry it.
- Estimated drying time: 40 seconds. Adjustable time by potentiometer from 0 to 90 seconds.

SUGGESTED TEXT FOR PRESCRIPTION

NOFER hand dryer, with AISI 304 stainless steel housing polish finish, hot air operated by electronic sensor, 1500 W power and temperature of 50°C. Motor speed 2800 r.p.m. Dimensions: 240 height x 280 width x 165 depth (mm).



NOFER S.L.
 Avenida de la fama, 118
 08940 · Cornellà de Llobregat (Barcelona)
 Tel +34 934 742 423 · Fax +34 934 743 548
 nofer@nofer.com · www.nofer.com


Related Products

01101.B

01250.B

01600.S

TECHNICAL DRAWING

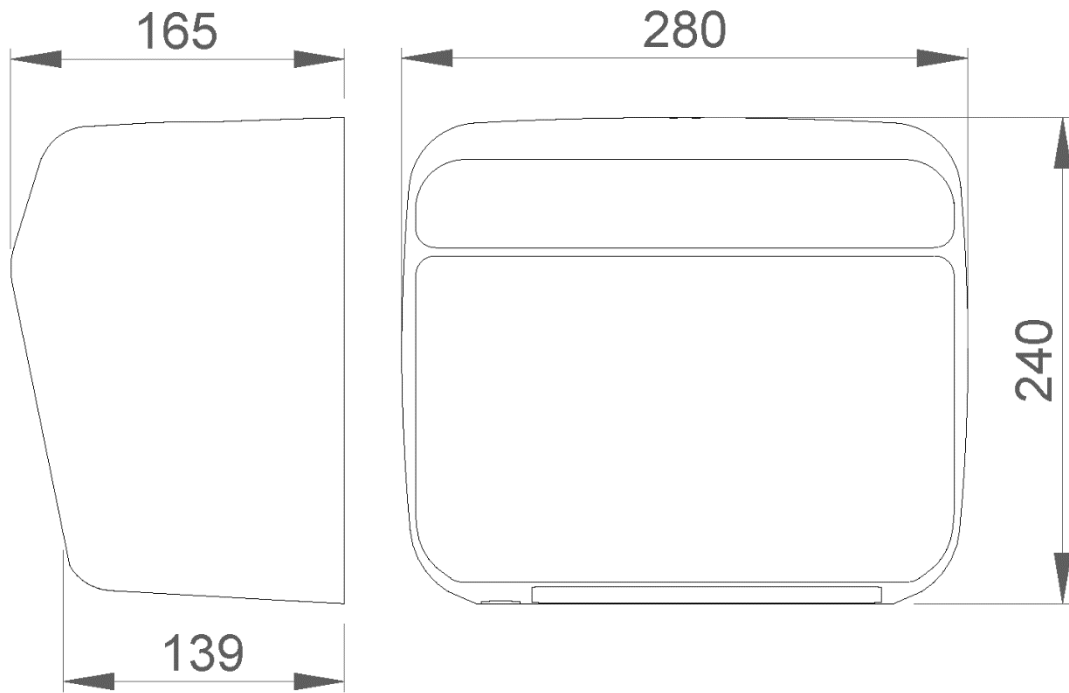

DIMENSIONS IN mm



NOFER S.L.
 Avenida de la fama, 118
 08940 · Cornellà de Llobregat (Barcelona)
 Tel +34 934 742 423 · Fax +34 934 743 548
 nofer@nofer.com · www.nofer.com