	HAND DRYER Ö 01100.S
	Hand dryer with push button
	 Hand dryer activated by timed push button. Model for mounting on the surface. Stainless steel sheet housing satin finish. Also available in polish finish (NOFER 01100.B) and white finish (NOFER 01100.W). Suitable for collectivities and places of high frequency of use. Indicated for uninterrupted use. Top quality components. Robust, anti-vandal and safe because it is built without sharp edges or other dangerous elements. In accordance with European safety directives (EC).
NOFER	TECHNICAL DATA
	 Housing made of one piece satin finish of AISI 304 stainless steel (thickness=1,2 mm). Air temperature (environment 20°C): 53°C to 10 cm. Motor speed: 6500 r.p.m. Air speed: 117 km/h. Total power: 2450 W. Motor power: 250 W. Voltage/Frequency: 220-240 - 50/60 Hz. Electric insulation: Class I. Automatic stop due to vandalism. Maximum consumption of 10,6 A. Noise level at 2 meters: 70 dBA. Protection index: IPX1. Dimensions: 240 height x 265 width x 210 depth (mm). Net weight: 5,5 kg. Electrical protection of the motor: fuse. Electrical protection of the resistance: internal thermostat. Function: press the button, the hand dryer is activated and place you hands under the appliance. The appliance is automatically turned off bu a timer.
SUGGESTED TEXT FOR PRESCRIPTION NOFER hand dryer, with AISI 304 stainless steel housing satin finish, hot air operated by push button, 2450 W power and temperature of 53°C. Motor speed 6500 r.p.m. Dimensions: 240 height x 265 width x 210 depth (mm).	 by a timer. Cleaning: we recommend cleaning with a cotton cloth slightly moistened with a soap solution. Then dry it. Estimated drying time: 28 seconds.
NOFER S.L. Avenida de la fama, 118 08940 · Cornellà de Llobregat (Barcelona) Tel +34 934 742 423 · Fax +34 934 743 548 nofer@nofer.com · www.nofer.com	pegage PDU PDU PDU PDU PDU PDU PDU PDU

.0368 - These specifications can be modified and/or rectified due to manufacture requirements.




HAND DRYER

ខ្លី 01100.S

Hand dryer with push button

TECHNICAL DRAWING

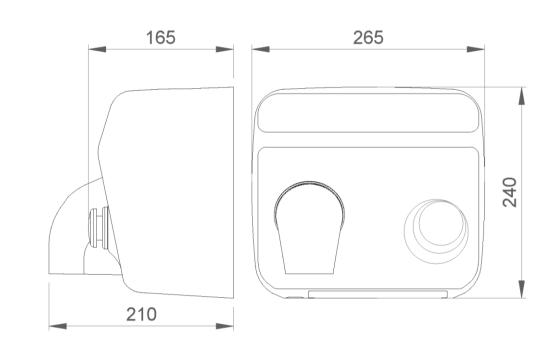

DIMENSIONS IN mm



NOFER S.L. Avenida de la fama, 118 08940 · Cornellà de Llobregat (Barcelona) Tel +34 934 742 423 · Fax +34 934 743 548 nofer@nofer.com · www.nofer.com