

Wall mounted emergency eyewash

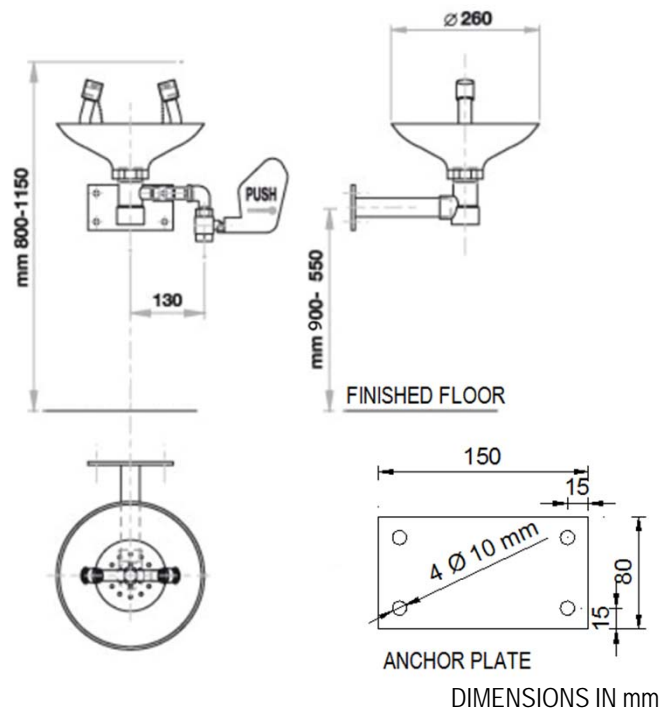

- Wall mounted emergency eyewash.
- High water flow and low water pressure.
- Instant automatic opening and closing activated by lateral lever.
- Double aerated jet with dust cover.
- Green color RAL 6029.
- Suitable for industries, laboratories and generally where there is risk of personal damages from fire, acids, chemical reactants, petroleum products, radioactive materials or other contaminants.
- CE conformity.

TECHNICAL DATA

- Eyewash basin made of green polypropylene.
- Manufactured in zinc galvanized steel covered with epoxy paint.
- Connecting parts in brass.
- Water pressure, minimum 1.5 – maximum 5 bar.
- Water flow: 14 l/min 10%.
- Water inlet dimension: 1/2".
- Outlet dimension: 1+1/4".
- Recommended high installation: 800 – 1150 mm from finished floor.
- Dimensions: basin Ø 260 mm.

SUGGESTED TEXT FOR PRESCRIPTION

NOFER or similar emergency eyewash. Instant automatic opening and closing activated by lateral lever. Manufactured in zinc galvanized steel covered with epoxy paint. Eyewash basin and arms made in green polypropylene. Dimensions: basin Ø 260 mm.

TECHNICAL DRAWING


NOFER S.L.
 Avenida de la fama, 118
 08940 · Cornellà de Llobregat (Barcelona)
 Tel +34 934 742 423 · Fax +34 934 743 548
 export@nofer.com · www.nofer.com

Related Products


SC700



SC710



SC380



SC820



SC800



SC730